QUICKLINKS GOLF SIM BUILD PLANNER

Example — Omaha basement bay (example) | New job | Duplicate | Save job

Example — not saved

01 SALES QUOTE & VISUAL | 02 BUILDER ROUGH-IN CAD | 03 INSTALLER BUILD PLAN | JOBS | PRICE BO

SCREEN & WALL PANELS +

LAUNCH MONITOR +

PROJECTOR +

COMPUTER, MONITOR, TVS +

TURF, MAT & PUTTING +

NOTES +

BUILDER ROUGH-IN CAD


For the home builder, remodeler or homeowner's trades: where to put backing, receptacles, low-voltage and 2" tech tubes before drywall. Dimensions are from the left wall (X, facing the screen) and the screen/back wall (Y).

Job Example — Omaha basement bay

Client	Example client · Homeowner
Location	Omaha, NE
Status	Lead example


REFLECTED CEILING + FLOOR PLAN

Download builder sheet

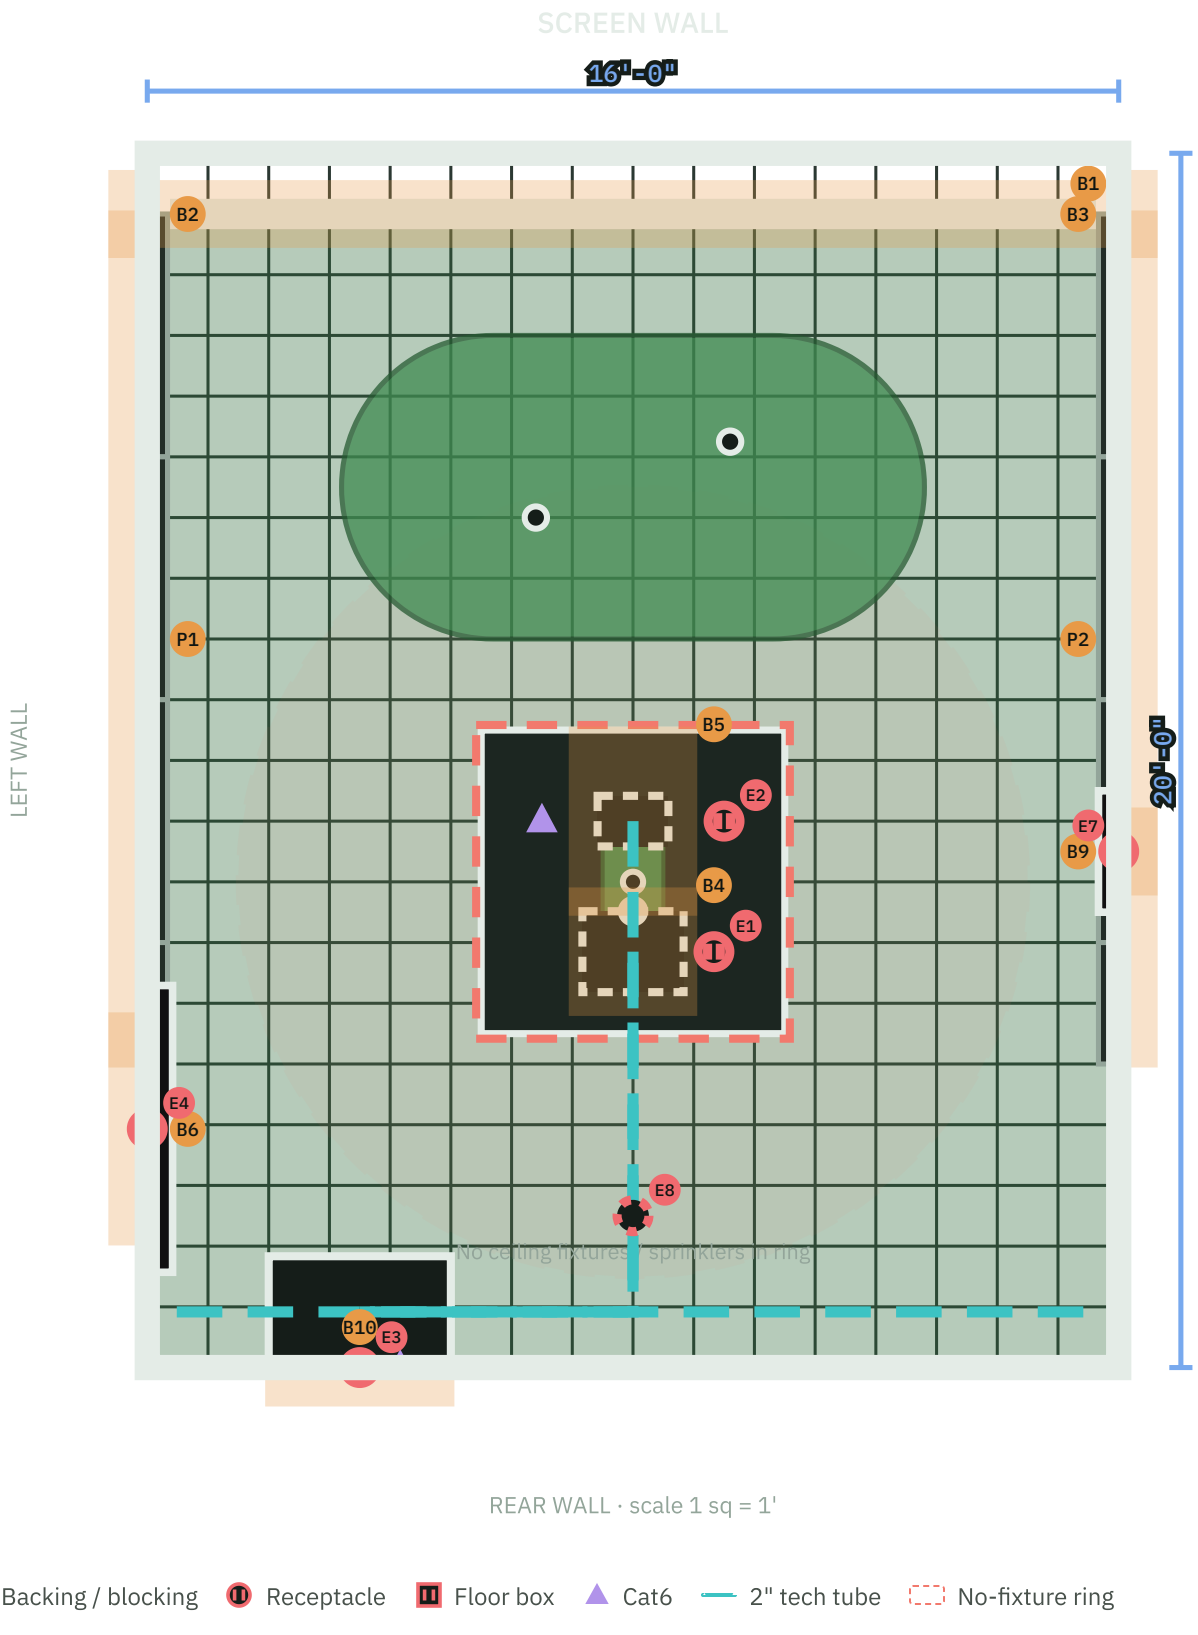

WALL ELEVATION

Screen | Left | Right | Rear

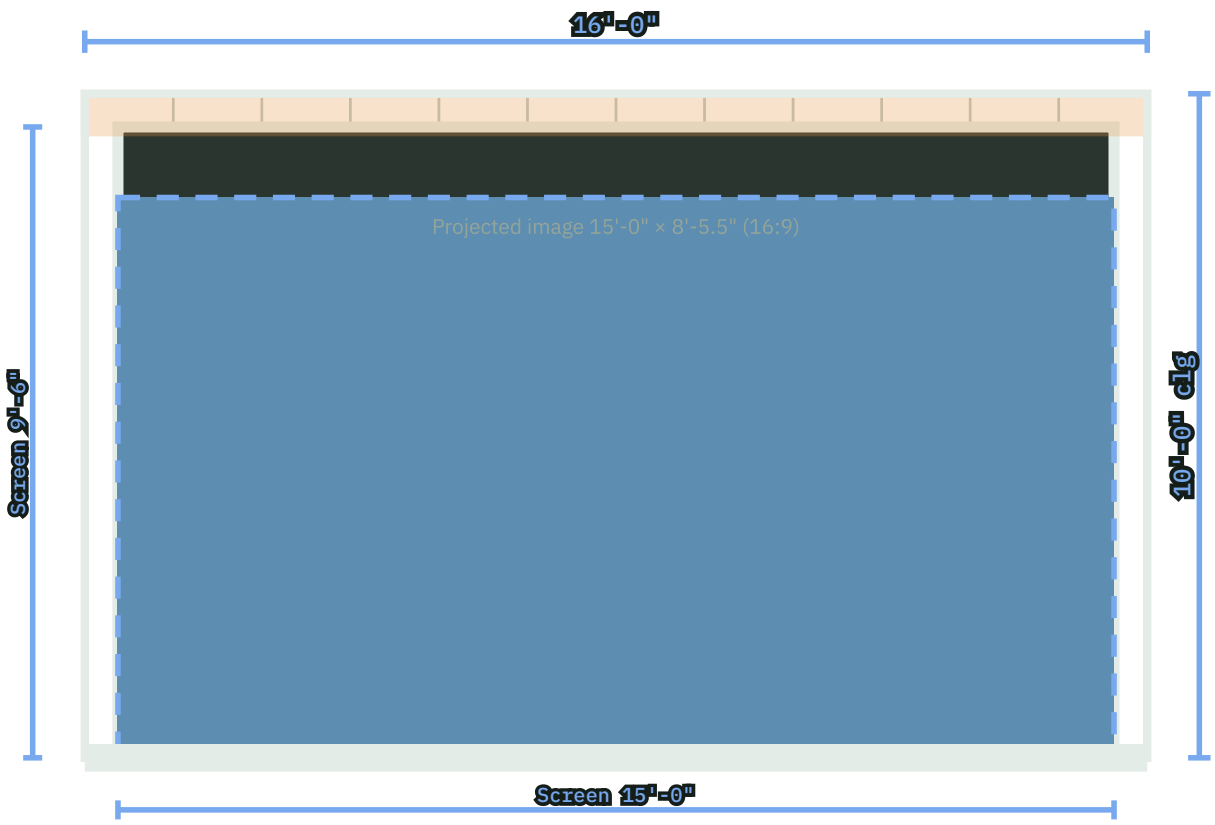

SCREEN WALL — looking at screen

BACKING SCHEDULE

TAG	ITEM	WHERE	SPEC	LOCATION	SIZE
B1	Screen frame ceiling blocking	Ceiling	Continuous 2×6 blocking full width, centered on screen line	X 8'-0" · Y 1'-0"	16'-0" × 12"
B2	Screen frame left wall backing	Left wall	2×6 vertical backing floor to ceiling, 16" wide centered on screen line	0'-4"–1'-8" along wall	16" × 10'-0"
B3	Screen frame right wall backing	Right wall	2×6 vertical backing floor to ceiling, 16" wide centered on screen line	0'-4"–1'-8" along wall	16" × 10'-0"
B4	Projector mount blocking	Ceiling	2×8 solid blocking between joists, 24"×24" pad	X 8'-0" · Y 13'-2"	24" × 24"
B5	Launch	Ceiling	2×8 solid blocking,	X 8'-0" · Y 11'-0"	24" × 36"

	monitor blocking		24"×36" pad (long axis on target line)		
B6	TV 1 backing (65")	Left wall	2×8 horizontal backing, two rows, spanning mount + 12"	14'-2.5"–17'-11" along wall	3'-8.5" × 28"
B9	Monitor arm backing	Right wall	2×8 backing 16"×16"	10'-10"–12'-2" along wall	16" × 16"
P1	Wall panel nailers — left wall	Left wall	2×4 flat blocking rows at 3", 48" and 93" AFF; studs 16" o.c. at panel seams (48")	1'-0"–15'-0" along wall	14'-0" run
P2	Wall panel nailers — right wall	Right wall	2×4 flat blocking rows at 3", 48" and 93" AFF; studs 16" o.c. at panel seams (48")	1'-0"–15'-0" along wall	14'-0" run
B10	Computer cabinet backing	Rear wall	2×6 horizontal backing at 30"–36" AFF for cabinet anchors	2'-0"–5'-0" along wall	3'-0" × 10"

ELECTRICAL + LOW VOLTAGE

TAG	ITEM	SPEC	LOCATION	HEIGHT
E1	Projector receptacle	Duplex in ceiling, dedicated 20A circuit recommended	X 9'-4" · Y 13'-2"	Ceiling
E2	Launch monitor receptacle	Duplex in ceiling beside LM blocking	X 9'-6" · Y 11'-0"	Ceiling
E3	Computer receptacles (2)	Two duplex at 18" AFF behind cabinet; dedicated 20A	X 3'-6" · Y 20'-0"	1'-6" AFF
E4	TV 1 recessed power	Recessed power/low-voltage box behind TV center	X 0'-0" · Y 16'-1"	5'-6" AFF
E7	Monitor receptacle	Duplex behind monitor	X 16'-0" · Y 11'-6"	3'-8" AFF
E8	Room lighting (by electrician)	Dimmable cans; none inside the red no-fixture ring; keep light off the screen	X 8'-0" · Y 17'-6"	Ceiling
D1	Cat6 at computer	2× Cat6 to network, terminate at cabinet	X 4'-2" · Y 20'-0"	1'-6" AFF
D2	Cat6 at launch monitor	Cat6 pulled to LM location (USB/ethernet extension)	X 6'-6" · Y 11'-0"	Ceiling

TECH TUBES

TAG	RUN	EST. LENGTH	PULL
T1	Projector → computer	22 ft	25 ft HDMI + USB/Cat6 pull string
T2	Launch monitor → computer	24 ft	25 ft HDMI + USB/Cat6 pull string
T3	TV 1 → computer	22 ft	25 ft HDMI + USB/Cat6 pull string
T6	Monitor → computer	40 ft	50 ft active optical HDMI + USB/Cat6 pull string

- 2" ENT (smurf tube) with pull string, sweeps not 90° elbows, terminate in a low-voltage ring at each end.
- Runs over 25 ft: plan active optical HDMI and powered USB or USB-over-Cat6 extenders.

GENERAL NOTES FOR THE TRADES

- Finished ceiling must be ≥ 10'-0" as drawn. Any soffit, duct or beam inside the swing ring changes this plan — send a photo to QuickLinks before framing.
- Solid blocking between joists at every ceiling pad, regardless of joist direction. No sprinkler heads, can lights or HVAC registers inside the no-fixture ring or between the projector and the screen.
- Screen wall: flat, smooth finish; paint the screen wall and the first 4' of ceiling flat black or dark grey to cut reflected light.
- Flush mat inset 5'-0" × 5'-0" at the mat location; slab or subfloor must be level within 1/8" over 10'.
- Dedicated 20A circuits for projector and computer; light switches on a dimmer at the room entry.